




www.autotex.net

# AUTOTEX

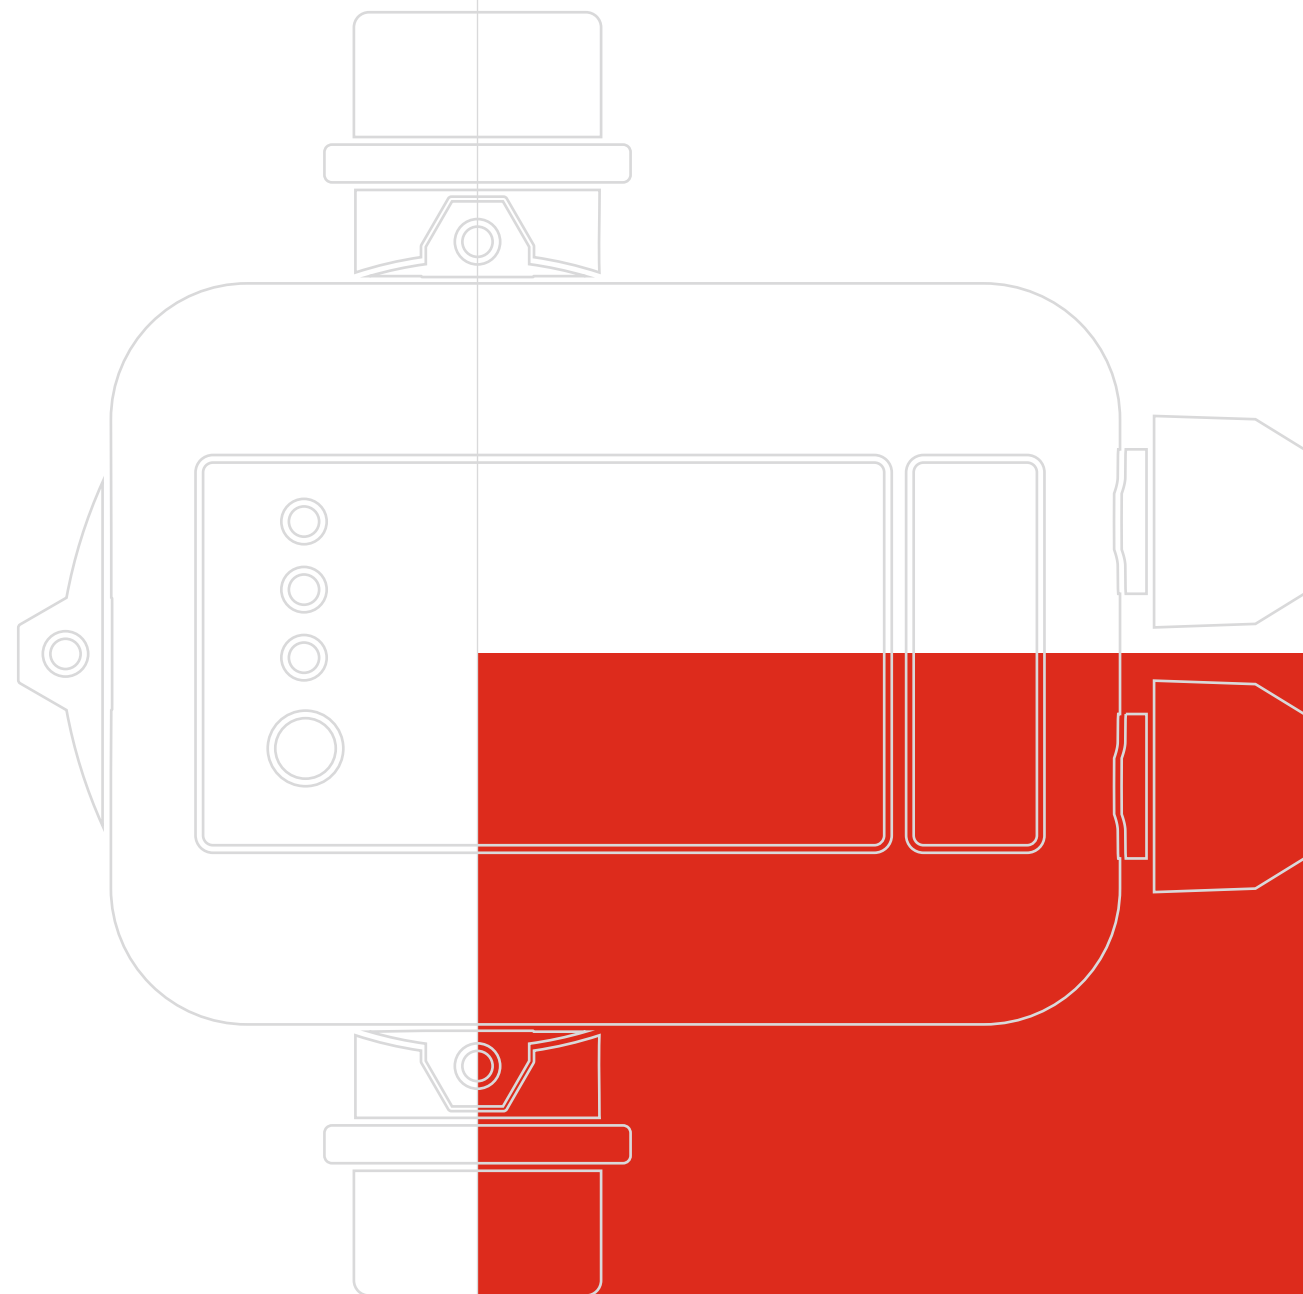

Pump Controller  
Float Switch  
Ventilating Fan  
Health Faucet  
Mosquito Racquet

## Autotex Private Limited

Regd. Office: 13/20, Sitra - Kalapatty road,  
Coimbatore - 641 014, INDIA

Phone: +91 422 4321515  
Web: www.autotex.net  
E-mail: sales2@autotex.net

Autotex system and innovations are  
protected by patents and  
applications.

Copyright © 2024. Autotex private  
limited, INDIA. All rights reserved.

092024

# Premium Quality OEM|ODM Products

Success by  
**Quality**





**AUTOTEX**

Simple and Reliable  
Superior in Quality and Affordable  
Technologically advanced and user-friendly

**AUTOTEX**

**40** years

Professional and reliable manufacturing  
partnership with global leaders



Servicing more than 50+ countries around the world

### Our Capabilities

**2 MILLION+**  
Pump Controllers  
Float Switch

**1 MILLION+**  
Ventilating Fans

**200+**  
Brands

**50+**  
Countries



## Value of Enterprise

Autotex has manufactured various products for Textile machinery, Water management systems, Sanitaryware, Electrical appliances, and Poultry Equipment since 1988. In this period, our company has grown as a leading manufacturer of engineering products for the above industries with immense quality standards.

Our quest for quality starts from R&D and Design and ends at the customer's point of view. The stringent in-house quality measures and standards have been proven and accepted by leading OEMs around the globe. This has enabled us to proudly attract customers from more than 50 countries for our products. Our customers prefer us, for our continuous developments through research, proven quality standards, On-time Delivery, and value for money.

This forms the basis for a highly structured activity at Autotex complying with the global standards of systematic process. Our responsibility does not end with just the supply of products; we strongly believe in after-sales service - a key area contributing towards total customer satisfaction.



We are certified for ISO 9001 Quality Management Systems and our products are certified by CB | CE | IEC | RoHS | REACH | GMark | SASO.



# AUTOTEX

Autotex products are developed by innovation. The constant improvements and developments, to meet the enhancing customer requirements by our world class quality standards are the key features.

## Our Quest for Quality Starts from Design

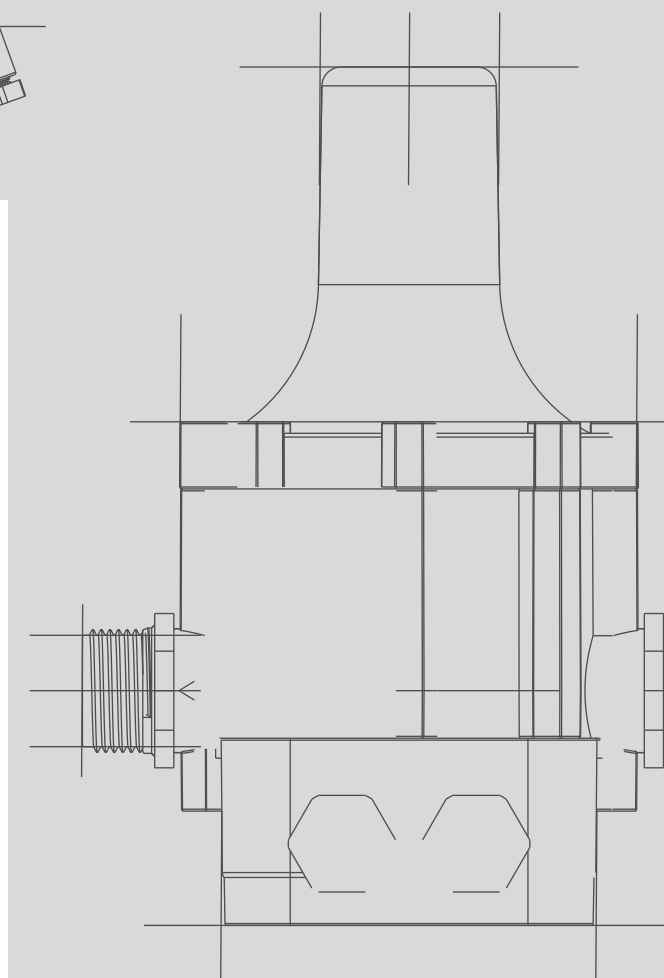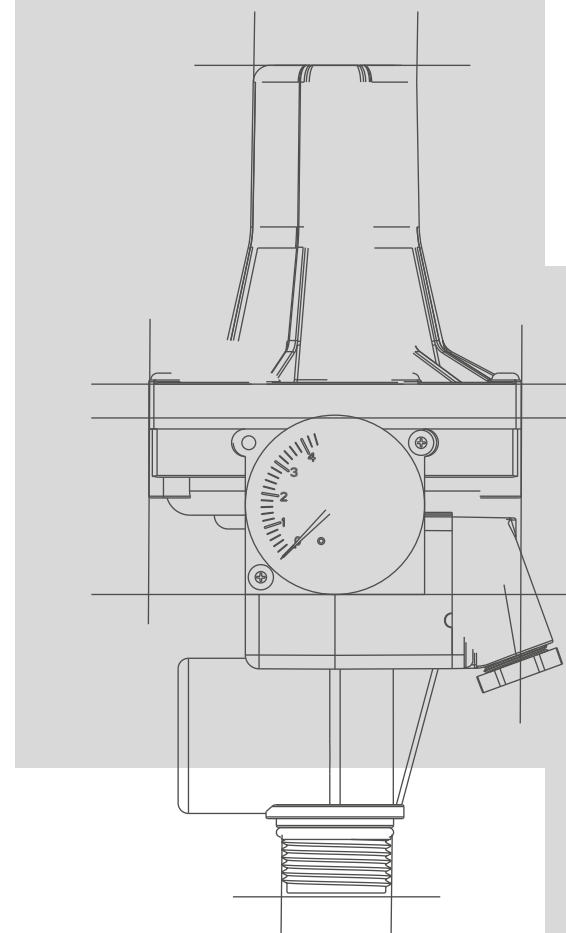





The Global Leader in Premium  
Quality Electronic Automatic  
**PUMP CONTROLLER**





## Automatic Pump Controller

### PC-02 | PC-03 | PC-04

#### Features:

- Built in Reset Button for forced restart.
- Automatic start and stop of pump.
- Protection against dry running.
- Over heat protection.
- Continuous monitoring of inline water pressure.
- Built-in pressure gauge for live indication.
- Auto restart, Anti-Jamming functions and 1" Plastic Union are available as optional add-ons.



PC-02



PC-03

#### Adjustable Screw (PC-02A)

Starting Pressure: 1.5 - 2.5Bar



## Automatic Pump Controller

#### Specification:

- Voltage : 220 - 240 V
- Frequency : 50 / 60 Hz
- Max. Intensity : 10 A - 1.1 kW
- Starting Pressure : 1.5 Bar
- Max. Pressure : 10 Bar
- Connecting Threads : G1 - ISO 228
- Operating Temperature : 0-60°C
- IP Rating : IP 65



PC-04

#### Adjustable Screw (PC-03A)

Starting Pressure: 1.5 - 2.5Bar




#### 1" Plastic Union



#### Dimension:

(PC-03)

(All dimensions in mm)

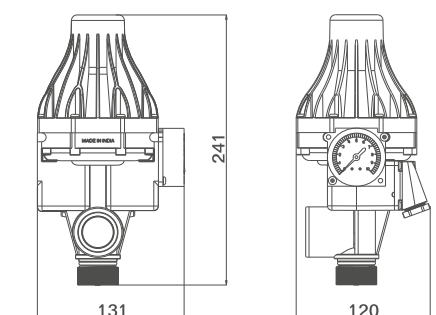



## Automatic Pump Controller


### PC-10



#### Signaling of the working phases and anomalies.

	<b>Power on</b>	Green LED on	Device energized
	<b>Pump on</b>	Yellow LED on	Pump running
	<b>Failure</b>	Red LED on	Water shortage
	<b>Restart</b>	Button	Reset after failure

### Installation Models

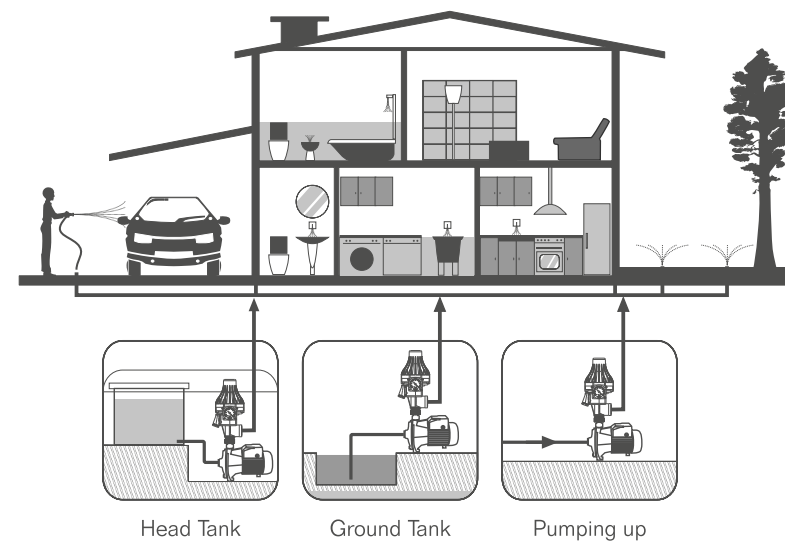

### Adjustable Screw (PC-10A)

Starting Pressure: 1.5 - 2.5Bar



## Automatic Pump Controller

### PC-15

#### Anti-Jamming Function

If, for any reason, the pump remains idle for 24 consecutive hours, the device will start the pump for about 7 seconds.

#### Adjustable Pressure

Selection of the device with the correct restart value.

Refer to the following table to choose the device with the correct restart value suitable to the characteristics of the system. Standard restart value is 1.5 bar. On request, restart values different from the standard are available as indicated in the table.



Restart Pressure	1.2 bar	1.5 bar	2.2 bar	2.5 bar
Floor Number	4	5	7	9
Building Height	12 mt	15 mt	22 mt	25 mt
Pump Pressure	min 2.5 bar	min 3 bar	min 3.5 bar	min 4 bar

#### Automatic Restart

In case of stopping due to a water shortage, the device will automatically make 24 attempts to rearm over the 24 hours following the failure, each lasting approximately 7 seconds to allow the pump and the system to reload if possible. The user can try to rearm the device anytime by pressing the Restart button.





**SAVE  
WATER  
EVERY  
DROP  
COUNTS**

Premium Quality  
**FLOAT SWITCH**

**AUTOTEX**

## Float Switch

### FS-15

Autotex float switch is extensively used for all types of water level controllers. It is waterproof and stays above the water level. It is also resistant to corrosion and abrasion. The advanced automatic float switch can actuate a pump, an indicator, an alarm, or other devices.




#### Features:

- Quality-tested | Strong and durable
- Suitable for installation on submersible pumps, water tanks and other water systems
- Auto-filling & Auto-emptying configurable.
- Cable length available 0.7m to 30m
- Cable size available: 0.75sq.mm to 1.5sq.mm
- Switch rating: 16A & 21A | Longer service life


#### Specification:

- Voltage : 220 - 240 V
- Frequency : 50 / 60 Hz
- Rated Current : 10(4) A
- Operating Temperature : 0-60°C
- IP Rating : IP 67

#### Overhead Tank:

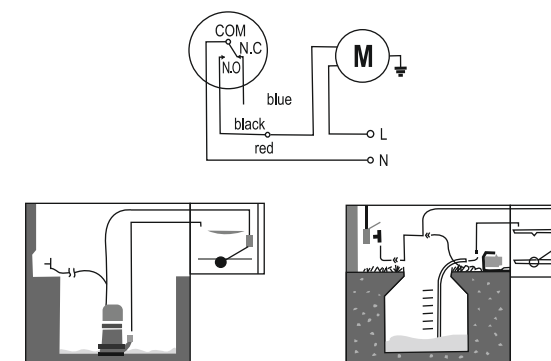


#### Watersump:

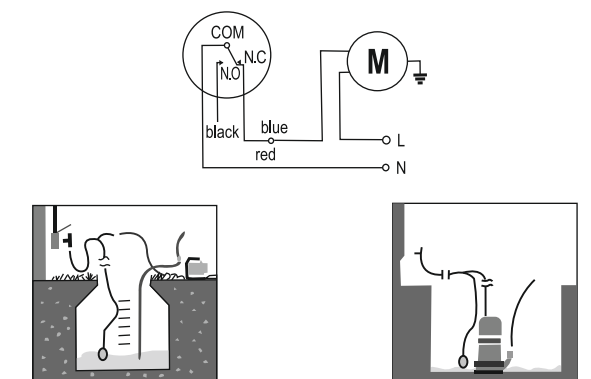



Premium Quality  
**VENTILATING FAN**  
**AXIAL & ROUND SERIES**

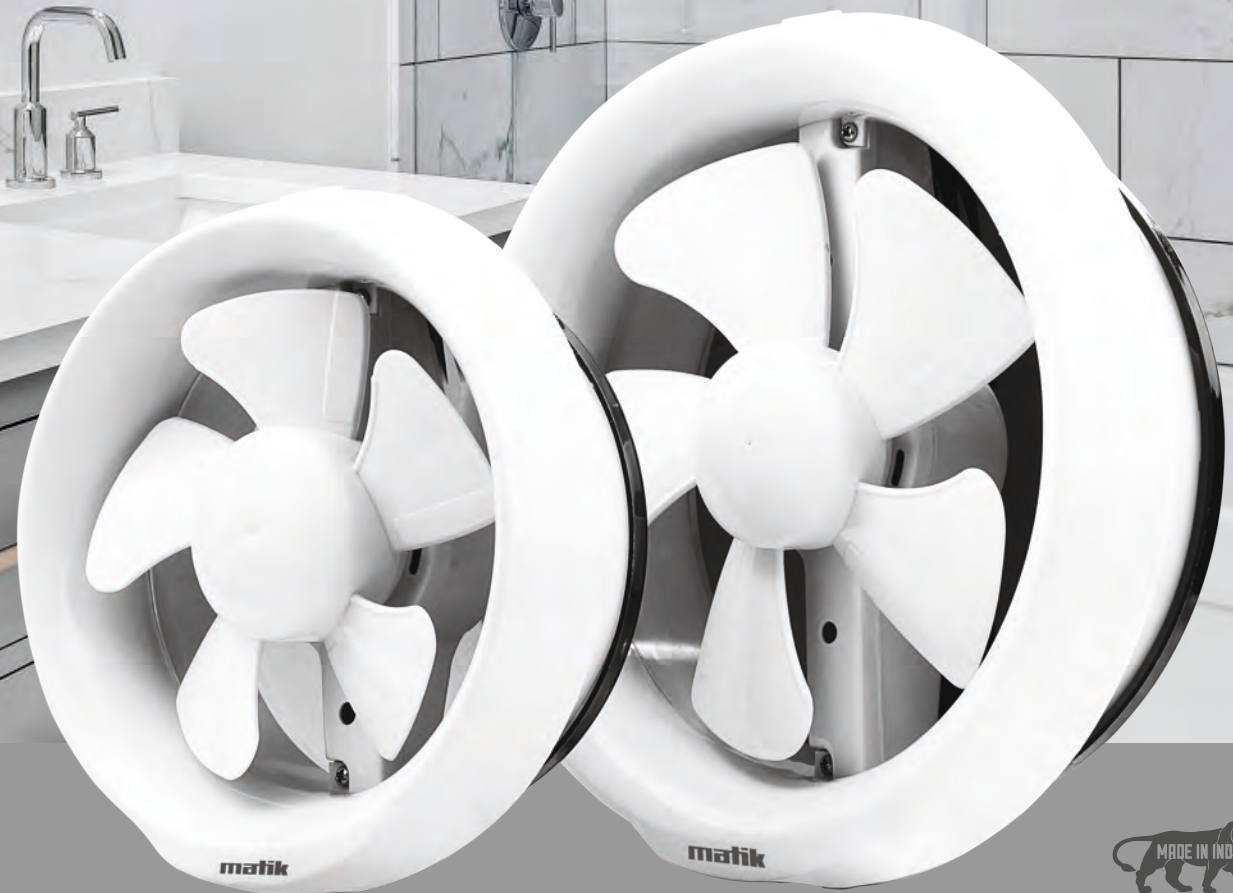



## Ventilating Fan - A Series

### VF-A6 / VF-A6S (with Shutter)



#### Panels




#### Features:

- Silicon steel motor.
- 100% Pure copper winding for long life.
- 5 & 7-Blade design for high air volume and low noise on operation.
- Built-in-thermal cut-out protector for safer use.
- Noiseless & Energy efficient.
- Easy to install on Wall / Glass / Wood
- Rear safety grill / shutter for added protection.

#### Dimension:

(All dimensions in mm)

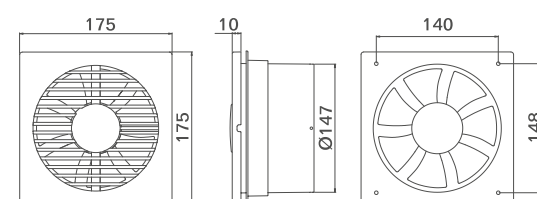

**Colours:** White Ivory Black


# AUTOTEX

## Ventilating Fan - A Series

### VF-A8 / VF-A8S (with Shutter)



#### Panels

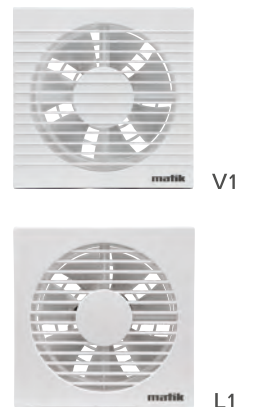

#### Applications:


- Bathroom
- Kitchen
- Bedroom
- Office

#### Specification:

- Voltage : 220 - 240 V
- Frequency : 50 / 60 Hz
- Size : 6 inch (150 mm) | 8 inch (200 mm)
- Power : 20 W | 23 W
- Air Volume : 220 m<sup>3</sup>/h | 360 m<sup>3</sup>/h
- RPM : 2200 r/min | 2100 r/min
- Noise (dB) : 42 (A6) | 45 (A6S) | 50 (A8) | 54 (A8S)

#### Dimension:

(All dimensions in mm)

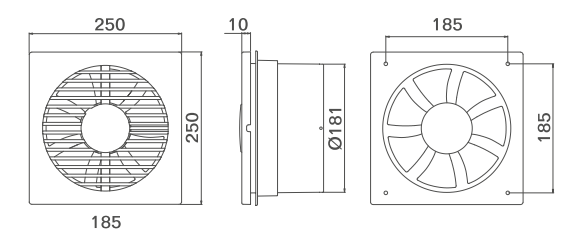



Ventilating Fan - A Series

VF-Prime




Features:

- Silicon steel motor.
- 100% Pure copper winding for long life.
- 7-Blade design for high air volume and low noise on operation.
- Built-in-thermal cut-out protector for safer use.
- Noiseless & Energy efficient.
- Easy to install on Wall / Glass / Wood.
- Rear safety grill/shutter for added protection.

Specification:

- Voltage : 220 - 240 V
- Frequency : 50 / 60 Hz
- Size : 6 in (150 mm)
- Power : 20 W
- Air Volume : 180 m<sup>3</sup>/h
- RPM : 2150 r/min
- Noise (dB) : 45

Dimension:

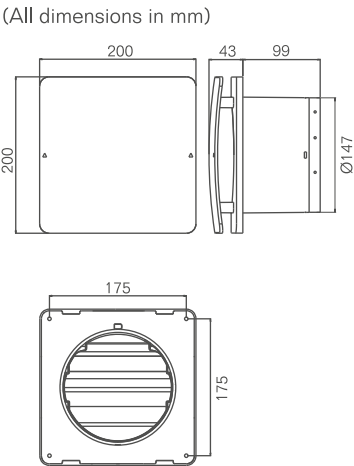

Colours:  Teak Wood  Ivory  Stone Grey


Ventilating Fan - R Series

VF-Round



Dimension:

(All dimensions in mm)

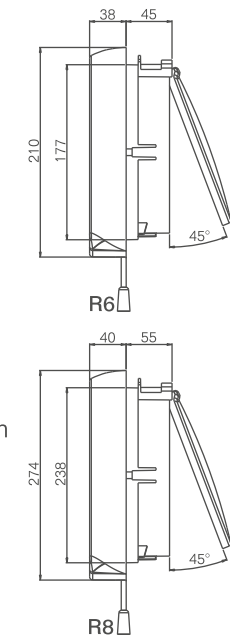

Features:

- 100% Pure copper motor.
- 5-Blade design for high air volume and low noise on operation.
- Pull Cord switch for easy operation
- Built in thermo fuse protection.
- Quiet & powerful air flow.
- Easy to install on Wall / Glass / Wood.
- Premium Japanese design.

Specification:

- Voltage : 220 - 240 V
- Frequency : 50 / 60 Hz
- Size : 6 inch (150mm)  
8 inch (200mm)
- Power : 15 W | 25 W
- Air Volume : 290 m<sup>3</sup>/h | 420 m<sup>3</sup>/h
- RPM : 1800 r/min | 1700 r/min
- Noise (dB) : 38 | 42

Applications:

Bathroom Kitchen Bedroom Office



Premium Quality

# HEALTH FAUCET (SHATTAF)



Royal

**AUTOTEX**

## Health Faucet (Shattaf)

### Classic

#### Features:

- Trigger & Nozzle gives a long life and rich appearance.
- Specially formulated polymer body helps to maintain cleanliness. | Simple design with premium finish.
- 1.2 & 1.5 mt PVC flexible hose.
- Complies with recommended pressure ratings.
- Switching mechanism endurance tested for 1,00,000 operations. 2-Way trigger for comfortable usage.



### Royal

#### Features:

- Chrome finished Trigger & Nozzle gives a long life and rich appearance.
- Highly polished Specialty Polymer body helps to maintain Cleanliness. Premium design and finish. 2-Way trigger for comfortable usage.
- Anti-rust 1.2 mt flexible hose assembly, with braided hose, chrome plated brass & stainless steel parts.
- Patented brass valve mechanism for an assured leak proof function.
- Switching mechanism endurance tested for 100000 operations.



Classic





# RECHARGEABLE ANTI MOSQUITO RACQUET



OPTIMA

PRIMA


**AUTOTEX**

## Mosquito Racquet



OPTIMA

PRIMA



### LONG BATTERY LIFE

500 mAh battery that lasts up to 1 month on one full charge.

### INSTANT KILL

High Voltage DC discharge kills mosquitoes in one touch.



### STRONG & DURABLE

Aircraft grade ABS plastic for strength and long life.

### BETTER COVERAGE

Large net area for better coverage.



### ERGONOMIC DESIGN

Comfortable grip & Shape for effective handling

### 3-LAYERED MESH

Extra layer of mesh for Extra protection



### Specification:

- Input Power Supply : 230V 50 Hz
- Output on Mesh : DC 2000 V  $\pm$  100 V
- AC Plug Type : Round (2 Pin)











AUTOTEX  
GREEN  
INITIATIVE

Autotex Wind Farm at Karnataka, INDIA



Autotex - Solar Plant

**AUTOTEX**

Try our products - Trying is ensuring  
See the difference - Seeing is believing

RIETER

TOYOTA

LMW

Textile  
Poultry  
Pump Accessories  
Appliances  
Coatings

SOHLER  
NEUENHAUSER

SCHÖNENBERGER

VOLVO

TVS

ASHOK LEYLAND

CRI

ELGI

LGB

rotork

Bräcker

SH

EURO  
SHATAL

Kinloskar

MARZOLI

SOHLER  
NEUENHAUSER

SIGMA

KTTM

salzer

OLA

ROOTS

ROYAL  
ENFIELD

GILBARCO  
VEEDER-ROOT

SCANIA

Bonfiglioli

DAIMLER

SAURER.  
Schlafhorst

trascar

ELECTRO-JET

SIGMA

TAFE

Craftsman

**AUTOTEX**

Our Sincere Thanks to Global Leaders